






## Base Build Up for BoundWorx® Resin Bound using BoundBase

This document gives guidance on a typical base build up for pedestrianised and light vehicle areas with a permeable base using the BoundBase system.

**ALL BASE DETAILS ARE INTENDED AS A GUIDE ONLY AND DO NOT CONSTITUTE A SPECIFICATION**

 15mm-18mm	BoundWorx® Resin: 15mm Pedestrian 18mm Light vehicle for larger vehicles or heavily trafficked areas*
	2mm
	30mm Pedestrian & Light vehicle
	2mm
<b>Capping Layer</b>	25mm of well compacted 2-10mm stone chippings
<b>Sub-base</b> 100-150mm	Well compacted Type 3 Crushed Limestone 100mm Pedestrian 150mm Light vehicle

\*For areas that are intended for use by large vehicles or more heavily trafficked, please contact us for advice on depth.

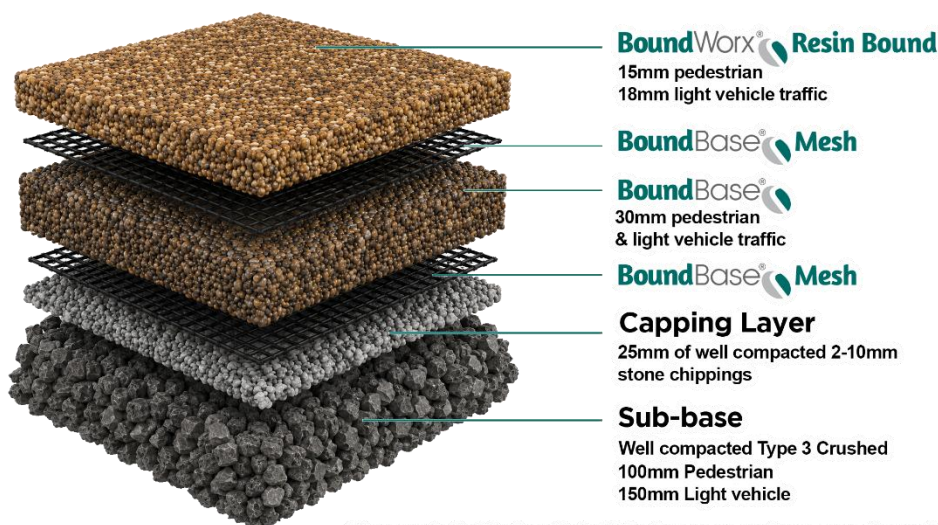

Please note that for heavily trafficked areas an engineers spec is required.

**BoundWorx® Resin Bound** can be applied onto the BoundBase System. Movement from the base below the BoundBase system is the installers responsibility and may cause issues with the finished surface above.

Any advice, recommendation or information given by Resin Bonded Ltd is based on practical experience and is believed to be accurate at the time of publication, no liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its Servants, or Agents.

The figures quoted do not constitute a specification. They represent typical values obtained for this product.